

SONTH



武汉尚斯机电有限公司 Sonth (HK) Industrial Co.,Ltd

SG33-395: dc spur gear motor



Description

- 1.Diameter: 33mm
- 2.Voltage: 12V (6~24V)
- 3.Input speed: 9000rpm (3000~15000rpm)
- 4.Reduction ratio: 1/18,1/52,1/10,1/255,1/718....
- 5.Output speed: 5~500rpm
- 6.Rated torque: 0.4~8Kg.cm
- 7.Can match encoder
- 8.Specs can be customized for you

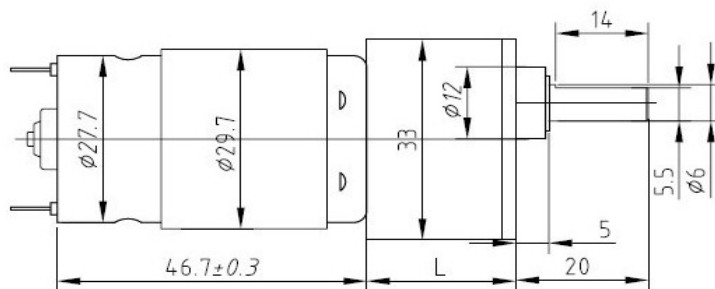

Reduction Ratio	Gearbox Length L= mm	No load Speed/rpm	Voltage 12V, Input 9000rpm (6V,9V,12V,24V)				Stall	
			At load Speed/rpm	At load Current/A	At load Torque/Kg.cm	At load Power/W	Current/A	Torque/Kg.cm
1/7.6	21.5	1200	1000	0.9	0.4	5.0	5.5	2.0
1/18	21.5	500	400	0.9	0.8	5.0	5.5	2.0
1/22	21.5	400	320	0.9	0.9	5.0	5.5	4.0
1/44	21.5	200	160	0.9	1.5	5.0	5.5	4.0
1/52	21.5	160	140	0.9	1.7	5.0	5.5	4.0
1/106	24.5	80	60	0.9	3.0	5.0	5.5	10
1/125	24.5	70	56	0.9	3.5	5.0	5.5	10
1/255	24.5	35	27	0.9	5.0	5.0	5.5	10
1/299	24.5	27	22	0.9	6.0	5.0	5.5	20
1/611	27.5	14	12	0.9	6.0	5.0	5.5	20
1/718	27.5	12	9	0.9	8.0	5.0	5.5	20

Tel: +86-27-87153161

Fax: +86-27-51893787

Address: 26th Floor,Block A,LongAn GangHui City,
MinZu Road,Optical Vally,WuHan,HuBei,China

Email: cassy@sonth-industrial.com

Web: www.sonth-industrial.com ; www.sonth123.com